



EASY-OFF

Auto Power Board

Automatically turns off equipment

Instruction Manual

ES-AUS1001

Notes on Safety




Caution

- Do not exceed the maximum load of 10A / 2400W either with a single appliance or with a group of appliances connected via a power strip.
- Do not plug 2 or more **EASY-OFF Auto Power Boards** together.
- For indoor use only.
- Always ensure the plug of any appliance is inserted fully into the **EASY-OFF Auto Power Board**.

Key points

- Equipment connected to the [Auto On / Off] sockets will not work if the main [Control] equipment is not turned on.
- **DO NOT** connect a power strip to any sockets of a **EASY-OFF Auto Power Board**.
- Do not exceed the total maximum load for the **EASY-OFF Auto Power Board**.

Parts

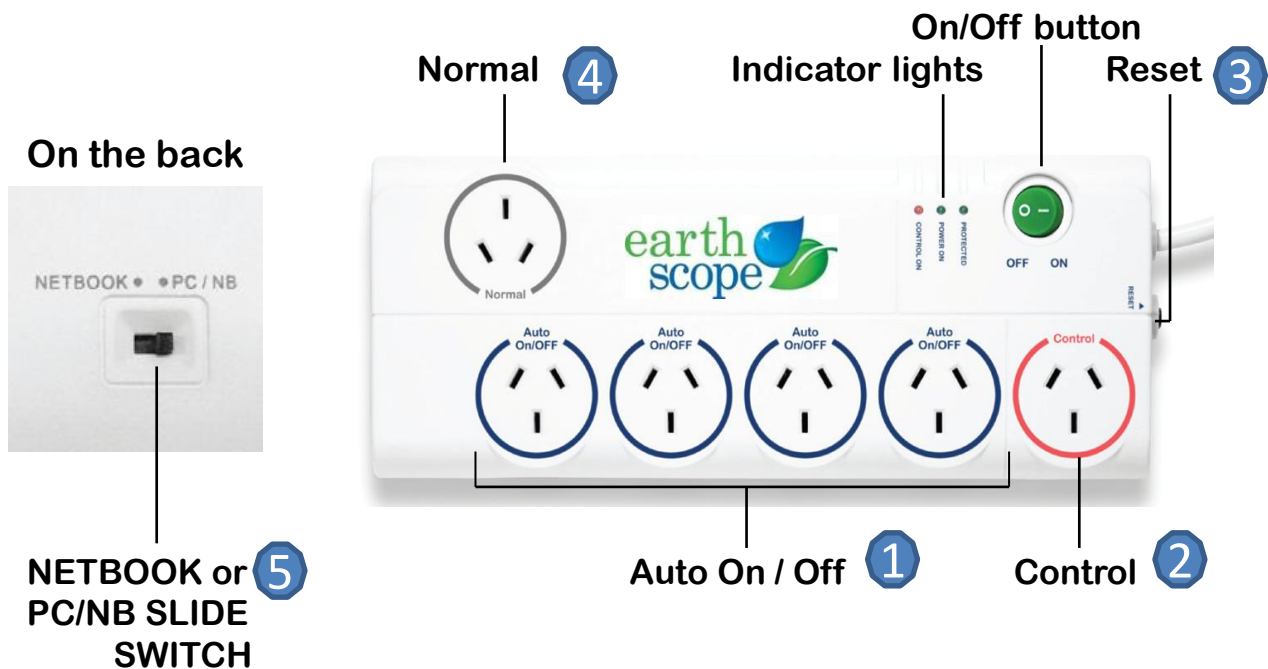

Usage

How to Set Up

1. Turn off all the appliances or equipment to be connected to the **EASY-OFF Auto Power Board**

2. Plug your chosen control equipment into the [**Control 2**] socket. We recommend your PC, laptop, or TV.



3. Connect the peripheral equipment you wish to automatically control into the [**Auto On/Off 1**] Sockets.



4. [**Normal 4**] socket is not switchable and provide continuous power for devices which always needs to stay ON.



5. Plug your **EASY-OFF Auto Power Board** into an available wall power sockets, and ensure it's ON.
6. Turn ON your control equipment in the normal way.
7. The indicator light on the **EASY-OFF Auto Power Board** will light up and all connected appliances will operate normally.

Automatically turns off PC & equipment

1. Turn off the appliance or equipment connected to the [**Control 2**] socket.




2. After approximately 1 minute the power to the 4 [**Auto On / Off 1**] sockets will Cut off ensuring the connected equipment is turned off.



3. The indicator [CONTROL ON] light will turn off.

Indicator Lights

- **PROTECTED** indicator Light
The light indicates the surge protection is working when lit.
- **POWER ON** indicator Light
The light indicates the **EASY-OFF Auto Power Board** is connected to the wall socket properly.
- **CONTROL ON** indicator Light
The light indicates the **EASY-OFF Auto Power Board** is fed with power



Usage

Circuit Breaker Reset

The [**Reset** ③] button allows the user to reset the circuit breaker after an overload condition has tripped the circuit breaker. Disconnect all equipment from the surge protector before pushing the [**Reset** ③] button.

- When you turn the [**Control** ②] equipment on again then power will be restored to all the equipment connect to the [**Auto On / Off** ①]

Netbook pc/nb slide switch

Netbook computers are designed to run on different and lower power Consumption patterns than a PC & Notebook. Due to this fact, **EASY-OFF Auto Power Board** may not recognise Netbook computers standby / sleep / ON & OFF Status in order to turn on & off the [**Auto On / Off** ①] sockets.

On the back of **EASY-OFF Auto Power Board**, select a proper switch setting for NETBOOK or PC/NB use [**NETBOOK or PC/NB SLIDE SWITCH** ⑤]. The Default setting of the switch is set to PC/NB. Slide the switch to NETBOOK if a netbook computer is connected to the **EASY-OFF Auto Power Board**.

Product Specifications

Model * ES-AUS1001

Dimensions * 263.5 (L) x 108 (W) x 36 (H) mm
(not including the power cord)

Power rating * 240V AC 50Hz 10A

Maximum watts load * 2400W

EMI / RFI Noise Filter * up to 40dB

1836 Joules built in surge protection

Power Wise Ltd

P.O. Box 942

Pukekohe 2340

New Zealand

PH: +64 274-982-752

WB: www.powerwise.co.nz

For more information and product support please visit
www.support.powerwise.co.nz